


MASONRY BRICK AND BLOCK

BLING SYSTEM SPECIFICATION

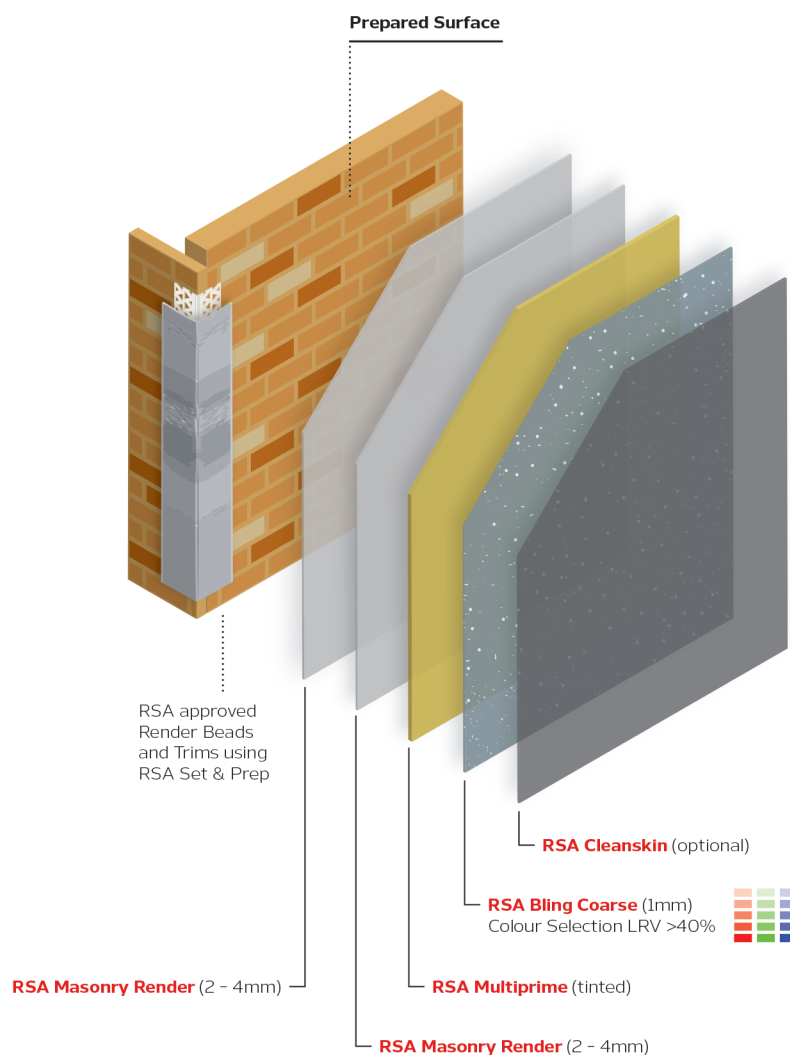

TECHNICAL AND AESTHETIC RATING - WITH RSA CLEANSKIN

FLEXIBILITY (crack resistance)	AESTHETICS (render straightness)	WATER TIGHTNESS	CARE AND MAINTENANCE	EFFICIENCY
Very Good	Excellent	Excellent	Excellent	Very Good

TECHNICAL AND AESTHETIC RATING - WITHOUT RSA CLEANSKIN

FLEXIBILITY (crack resistance)	AESTHETICS (render straightness)	WATER TIGHTNESS	CARE AND MAINTENANCE	EFFICIENCY
Very Good	Excellent	Very Good	Very Good	Very Good

MASONRY BRICK AND BLOCK BLING SYSTEM SPECIFICATION

Always read the relevant Technical Data Sheets (TDS) and Application Guidelines prior to the use of any RSA product.

INDEMNITY

Products must be applied in accordance with RSA Specifications and Technical Data Sheets by a skilled and experienced applicator.

RSA reserve the right to alter these specifications without further notice.

NOTE

DFT denotes Dry Film Thickness.

IMPORTANT

All substrate expansion, control and movement joints must be continued through the render system.

Due consideration must be given to weather forecasts and inherent climatic conditions to ensure appropriate curing (free from moisture ingress threats), of the product.

SUBSTRATE CHECK

Ensure the substrate has been installed in accordance with the manufacturers instructions and in accordance with correct building practices, paying particular attention to the positioning of control joints. The success and integrity of the coating system is dependant on the quality and installation of the substrate. Core filled masonry blocks must be fully cured for a minimum of 7 days prior to the application of a render system. RSA recommends a Wood Moisture Equivalent (WME) of less than 15% before commencing the render application process.

When applying RSA products over masonry blocks or clay bricks it is the applicators responsibility to check for variances and irregularities of density and porosity of the substrate before application. Masonry blocks and clay bricks can vary significantly and may affect adhesion of RSA products in some circumstances. It is the applicators responsibility to check with the substrate manufacturer for suitability of a rendered finish if variations of colour, density and porosity are present.

PREPARATION

Ensure all surfaces to be coated are sound, clean, dry and free from dirt, dust, loose material and / or contaminants. Brush the surface with a stiff broom prior to the application of any product. When rendering masonry blocks and clay bricks, it is highly recommended that the surface area is primed / sealed to ensure that the substrate achieves an even suction rate.

CORNER BEADS AND TRIMS

RSA Set & Prep must be used to install high quality, RSA Approved, UV resistant PVC corner beads and trims. For detailed installation information refer to the Set & Prep Application Guidelines.

STEP	PRODUCT	METHOD	BUILD	COVERAGE	RECOAT
RENDER COATS					
Step 1	RSA Masonry Render	Steel Trowel Float Finish	2 - 4mm	2m ² per 20kg (4mm)	
Step 2 (while still 'green')	RSA Masonry Render (if required)	Steel Trowel Sponge Finish	2 - 4mm	2m ² per 20kg (4mm)	24 hours
PRIMER COAT (essential)					
Step 3	RSA Multiprime (tinted)	Brush and Roller		80 - 120m ² / 15L	2 hours
TEXTURE COAT					
Step 4	RSA Bling Coarse (tinted)	Steel Trowel Plastic Float	1mm	12m ² / 15L	24 hours
PROTECTIVE COATING (Ensure curing time of 1 day per 1mm of render thickness is achieved prior to protective coating application)					
Step 5	RSA Cleanskin (1st Coat)	Brush and Roller	22 microns DFT	200 - 220m ² / 15L	2 hours

WARRANTY

Render Systems Australia (RSA) offers a 7 Year Product Warranty provided:

1. All substrates are installed in accordance with manufacturers specifications, Australian Standards and Good Trade Practices.
2. All products and processes as detailed above are applied by an RSA preferred contractor and in accordance with RSA Technical Data Sheets, Specifications, Application Guidelines and Good Trade Practices.
3. Guidelines Only – always refer to RSA Technical Data Sheets and Application Guidelines.

RSA strongly recommend viewing a physical product sample prior to selection of finish and colour.